

## 5. CONTENTS OF DELIVERY

1. Call indicator MKT-CF1 ..... 1pcs.
2. Passport ..... 1pcs.

# CALL INDICATOR MKT-CF1




### ATTENTION!

Indicator doesn't disassemble!

Wiring and connection of the indicator must be carried out by qualified personnel.

Use the indicator only for its intended purpose. Don't allow continuous operation, exceeding the maximum permissible load power, use of loads other than incandescent lamps.

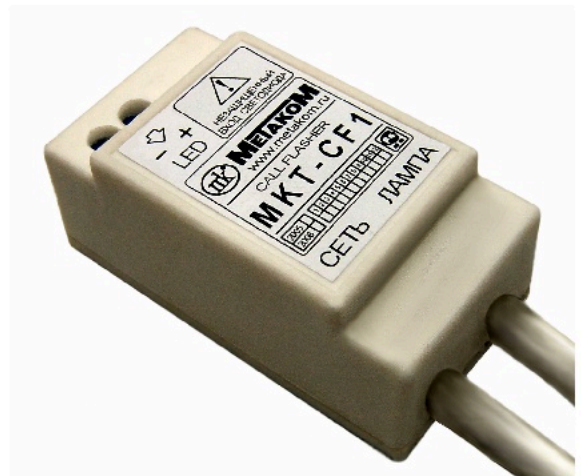

## PASSPORT USER'S MANUAL

<http://www.metakom.ru>  
E-mail: [os@metakom.ru](mailto:os@metakom.ru)



The product is certified

## 1. PURPOSE

The indicator of calling METAKOM MKT-CF1 (further - the indicator) is intended for installation in apartments of subscribers with the lowered hearing or in strongly noisy premises where the call signal of a door phone can be not heard.

The indicator is connected to the electronics board of any coordinate tube, which has an LED signaling signal (METAKOM TKP-10M, TKP-12M, etc.).

The indicator has a non-separable plastic housing and is a solid-state relay with optical insulation from the mains voltage of 220V and allows controlling the load (incandescent lamp) with a power of up to 150W. If several lamps are required, they can be connected in parallel, and their total power should not exceed 150W.

The load is switched on at the moments of the AC mains voltage transition through zero. Therefore, the service life of incandescent lamps connected to the indicator is significantly increased.

When a call comes from the intercom, the lamp briefly turns on (or flashes - this depends on the type of signal generated by the doorphone calling panel).

Fastening of the indicator in the place of installation can be carried out with the help of double-sided scotch tape.

## 2. MANUFACTURER'S WARRANTY

The manufacturer guarantees compliance of the call indicator METAKOM MKT-CF1 with the requirements of TU 6652-001-59879795-2003 when the user applies the rules of use, storage and transportation.

Guarantee period - 12 months

From the date of sale, but not more than 18 months from the date of manufacture.

### Manufacturer's address:

241024, Russia, Bryansk,  
Delegate str., 68.

LLC "METAKOM PLUS"

Tel./fax: (4832) 68-28-26,  
Tel: (4832) 68-28-24, 68-28-25.

www: <http://www.metakom.ru>  
e-mail: [sales@metakom.ru](mailto:sales@metakom.ru)

## 3. SPECIFICATIONS

Strength of electrical isolation of the input circuit from the lighting network, VRMS (VPK), no less than	5300 (7500)
Load power, W, not more than	150
Operating mode	Short-term
Permissible operating temperature range, ° C	-20...+45
Permissible humidity at + 35 ° C, %, not more than	93%
Dimensions of the indicator without wires, mm	28.5 x 53 x 23

## 4. CONNECTION EXAMPLE

